

3101 Lavatory Faucet

Cinaton

Application:
Bathroom Sink
Lavatory Sink
Medical & Office Sink

Finish: Chrome, Satin Nickel



Satin Nickel






Model: 3101

5 Sensor Completely Touch Free Bathroom, Lavatory Faucet

Cinaton

The faucet for a changing world

14014 Gannet Street, Santa Fe Springs, CA 90670
Phone: (855) 348-8080 www.cinaton.com

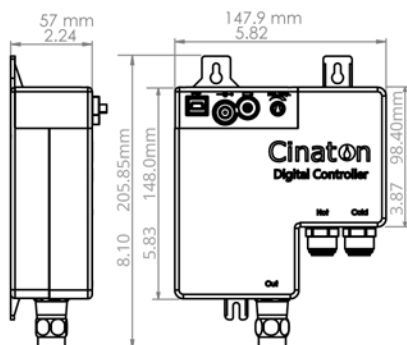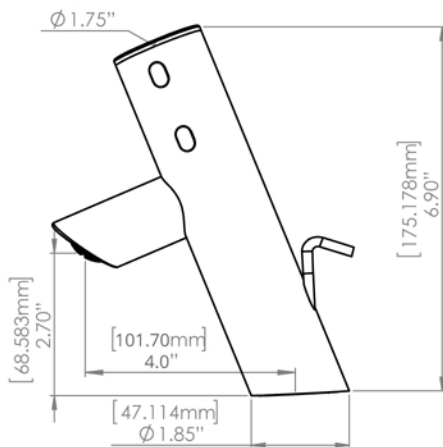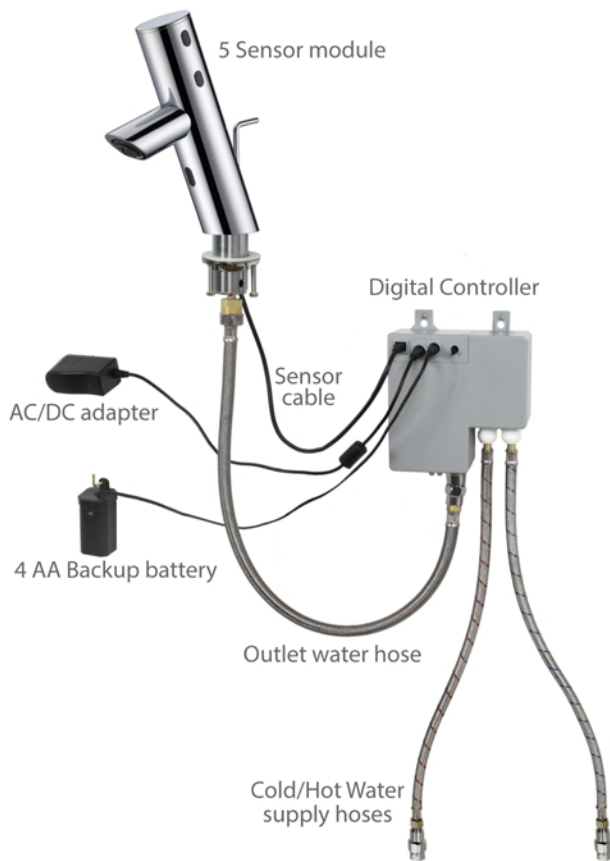

Product Description:

3101 Touch Free Bathroom, Lavatory Faucet

Standard Specification:

- Cinaton iSense® completely touch free technology
- No handle, no touch, no germ
- 5 infrared sensors perform complete faucet function
- Easy operation without touching faucet
- Integrated design for easy installation
- Intermittent water flow for 70% water saving
- Patented "Pause" function of easy sensor for working in sink area
- Three user-defined Preset settings for your convenience
- Full function water temperature and flow control
- Simple, clean, stylish design
- Maximum temperature setting for ADA compliance. No scalding risk for any age (children, elderly and the disabled).
- Includes Digital Controller. Cold and hot water supply hoses.
- Max flow rate 1.5 gpm (5.67 L/min)
- 120/240 AC/DC 6 volt adapter included.
- 4 AA Backup battery for continuous use during electric power outage.
- Single hole mount for less counter clutter and easy operation.
- Solid brass construction for durability
- Mounting bracket 1" ϕ
- Finish: Chrome and Satin Nickel
- 5 year limited warranty against manufacturer defects

Operation:

- Cinaton iSense® completely touch free operation

Applicable Codes & Standards

- NSF61-9
- ASME A112.18.1/CSA 125.1
- ADA for no touch operation
- Contains no more than 0.25% lead by weight (AB1953)
- Water sense

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/8" (29mm) MIN. DIA.



3101 Bathroom, Lavatory Sink Faucet

5 Sensor Completely Touch Free

Parts List

11. faucet body CP (730011), SN (730012)

12. aerator (721102) - 1.5 GPM

13. (722002) mounting pipe 1" Ø

14. (722012) rubber washer 1" Ø

15. (722022) metal washer 1" Ø

16. (722032) mounting bracket 1" Ø

17. (722034) mounting screw (x3)

18. (722042) pull bar

21. (721312) 1/2" x 3/8" universal joint

22. 24" spout water outlet hose 3/8" (720006)

24. 1/2" spout water inlet connector

26. (721304) cold water inlet quick connector

27. (721304) hot water inlet quick connector

sensor (ABDE:755021) (C: 5"-755022)

42. (705035) sensor cable

44. (750001) AC/DC adapter

46. (750101) 4 AA backup battery box

71. (710000) Digital Controller

72. sensor cable input port

73. AC/DC 6 V input port

74. 4 AA DC backup battery input port

75. maximum temperature adjusting knob

76. (722035) battery box mounting L-shape screw

77. (722036) controller mounting screw (x3)

78. (750110) 4 AA backup battery

81. (720002) 24" cold water supply hose 3/8"

82. cold water supply shut off valve (not included)

83. (720001) 24" hot water supply hose 3/8"

84. hot water supply shut off valve (not included)

85. (721301) 3/8" x 1/2" check valve adapter housing

86. (721201) check valve

87. (721202) strainer

88. (721302) 1/2" x 3/8" adapter for 3/8" shut off valve

89. (721203) water supply washer 3/8"

