

4001 Lavatory Faucet

Application:
Bathroom Sink
Lavatory Sink
Medical & Office Sink

- 4001-R: Adjustable to maximum water supply temperature for bathroom, lavatory.
- 4001-L: Adjustable to comfortable water temperature for public lavatory.

Finish: Chrome, Brush Nickel

Cinaton



Brush Nickel



Chrome

Model: 4001



2 Sensor iSense® Automatic Touch Free Bathroom, Lavatory Faucet

Cinaton

The faucet for a changing world

14014 Gannet Street, Santa Fe Springs, CA 90670

Phone: (855) 348-8080 www.cinaton.com

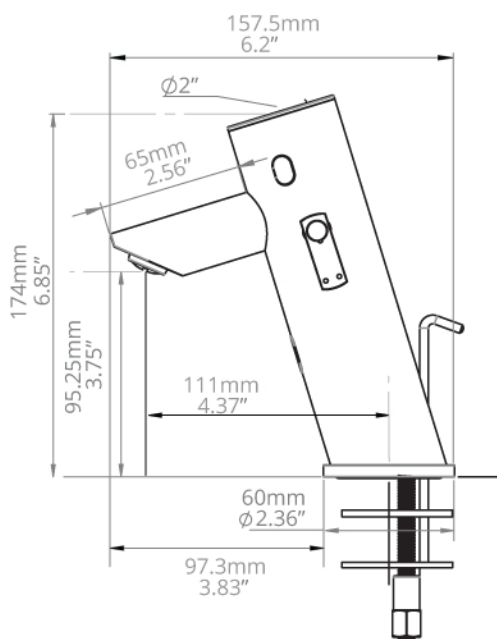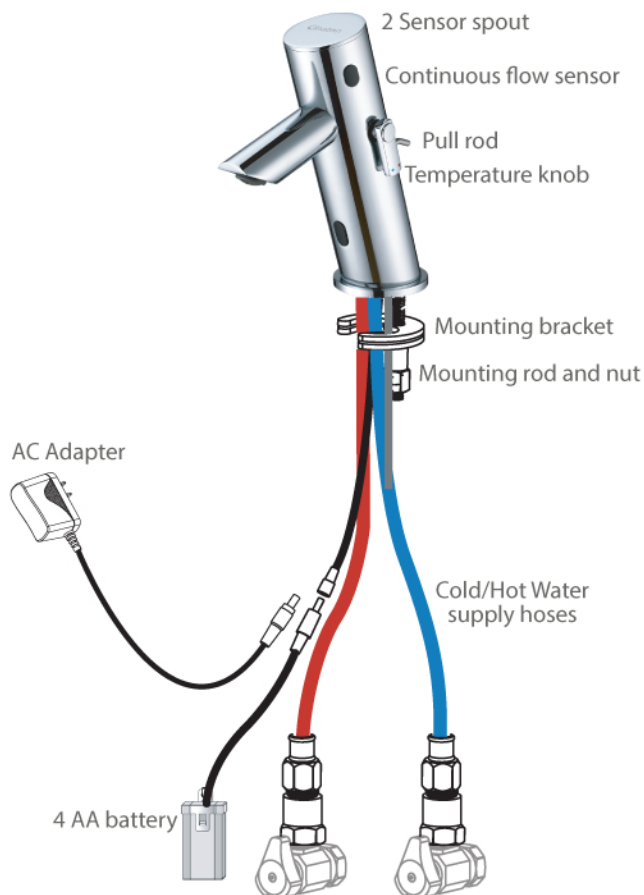

Product Description:

4001 Automatic Touch Free Bathroom, Lavatory Smart Faucet

Standard Specification:

- Cinaton iSense® touch free technology
- 2 infrared sensors perform touch free faucet function
- Easy operation
- Integrated design for easy installation
- Intermittent water flow for 70% water saving
- Patented "Pause" function of easy sensor for working in sink area
- Water temperature control knob
- Simple, clean, stylish design
- Includes cold and hot water supply hoses.
- Max flow rate 1.2 gpm (4.55 L/min)
- 4 AA battery and holder included
- 120/240 AC/DC adapter included.
- Single hole mount for less counter clutter and easy operation.
- Solid brass construction for durability and beauty
- Mounting rod 1/4" ϕ
- Finish: Chrome and Brush Nickel
- 5 year limited warranty against manufacturer defects for residential

Operation:

- Cinaton iSense® automatic touch free operation

Model:

- 4001-R: Adjustable to maximum water supply temperature for bathroom, lavatory.
- 4001-L: Adjustable to comfortable water temperature for public lavatory.

Applicable Codes & Standards:

- NSF61-9
- ASME A112.18.1/CSA 125.1
- ADA for no touch operation
- Contains no more than 0.25% lead by weight (AB1953)
- Water sense

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/8" (29mm) MIN. DIA.



7 0 2 0 1 1 - 4 0 0 1

4001 Bathroom, Lavatory Sink Faucet

Automatic 2 Sensor Smart Faucet

Parts List

11. faucet spout CP (730021), BN (730022)

12. (721114) aerator - 1.2 GPM

13. (722003) mounting rod 1/4" Ø

14. (722004) mounting nut 1/4" Ø

15. (722005) rubber washer 1/4" Ø hole

17. (722007) mounting Bracket 1/4" Ø hole

18. (722042) pull bar

19. (722201) spout seal rubber O-Ring

31. water temperature adjustment knob (722051)

32. water temperature adjustment knob cap (722052)

41. sensor (A:755021) (C: 755022)

42. power supply cable (755041) and connector

44. (750001) 120~240V AC/DC adapter

46. (750102) 4 AA battery box

76. (722035) battery box mounting L-shape screw

81. (720002) 24" cold water supply hose 3/8"

82. cold water supply shut off valve (not included)

83. (720001) 24" hot water supply hose 3/8"

84. hot water supply shut off valve (not included)

85. (721301) 3/8" x 1/2" check valve adapter housing

86. (721201) check valve

87. (721202) strainer

88. (721302) 1/2" x 3/8" adapter for 3/8" shut off valve

89. (721203) water supply washer 3/8"

